


# JTV PTO VACUUM EXCAVATOR

## VAC-TRON SERIES



**CVS (CYCLONE 4-WAY VALVE SILENCER) FILTRATION SYSTEM** 0.5-micron filtration (best in the industry). The CVS Filter housing also contains the 4-way valve for reverse pressure and an oversized silencer for quiet operation. The silencer is located inside the 28" diameter cyclone.

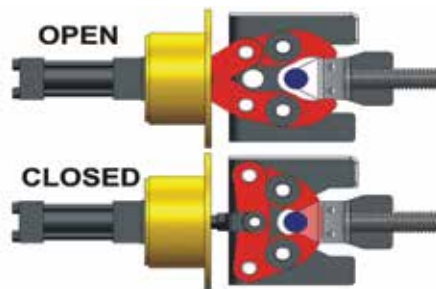

**REAR HYDRAULIC CLAW DOOR** Rear hydraulic claw door has an over center locking mechanism for a simple no fuss positive lock and unlock.



**JETTER PACKAGE** 15 gpm @ 3,000 psi water pump with 425' x 1/2" jetter hose that comes with electric self-retracting hose reel.



**STRONG ARM (OPTION)** With 270-degree rotation, the strong arm supports the weight of the vacuum hose and the roller head makes handling much easier by allowing smooth, fluid movements and adjustments.



**HYDRAULIC BOOM (OPTION)** The hydraulic boom offers a 6-way function, wireless remote with vacuum valve operation, 330-degree rotation, remote water jet for easy cleanout, and a 5" hose with quick connect to 4" tooling.



**PTO DRIVEN** All components are controlled from the truck eliminating the extra weight, space, and cost of the pony motor. Available on a Ford F-650 or F-750 chassis.

[WWW.VERMEERMVS.COM](http://WWW.VERMEERMVS.COM) | 888-822-8766



DIMENSIONS-SKID	873 ON FORD F-650	873 ON FORD F-750
<b>Length</b>	345" (876.3 cm)	345" (876.3 cm)
<b>Width</b>	102" (259.1 cm)	102" (259.1 cm)
<b>Height</b>	120" without boom (305 cm)	120" without boom (305 cm)
<b>Empty Weight</b>	17,150 (7,779 kg)	18,300 (8,301 kg)
<b>GVWR</b>	26,000 lbs (11,793.4 kg)	33,000 lbs (14,968.5 kg)
ENGINE	873 ON FORD F-650	873 ON FORD F-750
<b>Make and Model</b>	PTO Driven	PTO Driven
<b>Enclosure</b>	N/A	N/A
WATER TANK	873 ON FORD F-650	873 ON FORD F-750
<b>Water Tank Capacity</b>	400 gal (1,514 L)	400 gal (1,514 L)
<b>Number of Tanks</b>	2	2
<b>High Pressure Pump Flow Rate</b>	15 gpm (15.1 L/min)	15 gpm (15.1 L/min)
<b>High Pressure Pump</b>	3,000 psi (206.8 bar)	3,000 psi (206.8 bar)
<b>High Pressure Jetter Hose Length</b>	425' (130 m)	425' (130 m)
<b>Low Water Shut Off</b>	Electric	Electric
SPOIL TANK	873 ON FORD F-650	873 ON FORD F-750
<b>Spoil Tank Capacity</b>	800 gal (3,028.3 L)	800 gal (3,028.3 L)
<b>Door Type</b>	Hydraulic	Hydraulic
<b>Tank Lift Type</b>	Scissor Lift	Scissor Lift
VACUUM	873 ON FORD F-650	873 ON FORD F-750
<b>Type of Filters</b>	Cartridge 0.5 Micron	Cartridge 0.5 Micron
<b>Hose Length</b>	30' (9.1 m)	30' (9.1 m)
<b>Hose Width</b>	4" (10.2 cm)	4" (10.2 cm)
<b>Vacuum</b>	1,000 cfm (28.3 cm m/min)	1,000 cfm (28.3 cm m/min)
<b>Vacuum Blower Type</b>	PD Blower	PD Blower
<b>Vacuum Mercury</b>	16" hg (.5 bar)	16" hg (.5 bar)
CONTROL PANEL	873 ON FORD F-650	873 ON FORD F-750
<b>Controls</b>	Curbside	Curbside

#### OPTIONS (FOR ALL)

- 6-Way Hydraulic Boom with Wireless Remote
- Recirculation Kit

Specifications subject to change without notice.

Vac-Tron Equipment, LLC reserves the right to make changes in engineering, design and specifications; add improvements; or discontinue manufacturing at any time without notice or obligation. Equipment shown is for illustrative purposes only and may display optional accessories or components. Please contact your local Vermeer dealer for more information on machine specifications. Vermeer, the Vermeer logo and Vermeer MV Solutions are trademarks of Vermeer Manufacturing Company in the U.S. and/or other countries. Vac-Tron is a trademark of Vac-Tron Equipment, Inc. © 2019 Vac-Tron Equipment, Inc. All Rights Reserved. Printed in the U.S.A. Please recycle.

