


CV SGT VACUUM EXCAVATOR

VAC-TRON SERIES



0.5 MICRON FILTRATION Cyclonic filtration separator as well as a secondary filter to clean the air down to 0.5 microns.

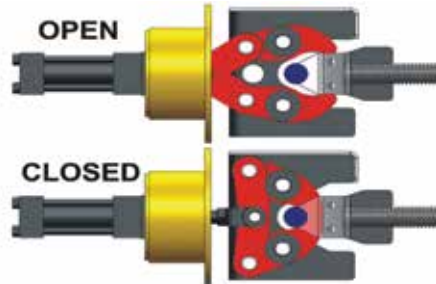

REAR HYDRAULIC CLAW DOOR Rear hydraulic claw door has an over center locking mechanism for a simple no fuss positive lock and unlock.



POLYMER LINER The polymer liner inside the debris tank on the bottom half makes for easy dumping and cleanout.



STRONG ARM (OPTION) With 270-degree rotation, the strong arm supports the weight of the vacuum hose and the roller head makes handling much easier by allowing smooth, fluid movements and adjustments.



REVERSE PRESSURE Reverse Pressure to off-load liquids and dislodge debris in hose is standard.



I BEAM TRAILER Units are built from start to finish at our factory, including the trailer which consists of a sturdy I-Beam construction.

WWW.VERMEERMVS.COM | 888-822-8766



Vermeer
MV Solutions™

DIMENSIONS-TRAILER	573 SGT	873 SGT	1273 SGT
Length	228" (579 cm)	246" (625 cm)	248" (630 cm)
Width	93" (236 cm)	97" (246 cm)	102" (259 cm)
Height	89" (226 cm)	89" (226 cm)	122" (310 cm)
Empty Weight	4,850 lbs (2,200 kg)	5,350 lbs (2,427 kg)	7,350 lbs (3,334 kg)
GVWR	9,995 lbs (4,534 kg)	14,000 lbs (6,350 kg)	24,000 lbs (10,886 kg)
Trailer Axles	(2) 7,000 lbs (3,175 kg)	(2) 7,000 lbs (3,175 kg)	(2) 12,000 lbs (5,443 kg)
ENGINE	573 SGT	873 SGT	1273 SGT
Make and Model	Kohler EFI Gas	Kohler EFI Gas	Kohler EFI Gas
Horsepower	38 hp (28.3 kw)	38 hp (28.3 kw)	38 hp (28.3 kw)
Fuel Tank Capacity	15 gal (56.8 L)	15 gal (56.8 L)	15 gal (56.8 L)
Enclosure	N/A	N/A	N/A
WATER TANK	573 SGT	873 SGT	1273 SGT
Water Tank Capacity	200 gal (757.1 L)	300 gal (1,135.6 L)	400 gal (1,514.2 L)
Number of Tanks	2	2	2
High Pressure Pump Flow Rate	4 gpm (15.1 L/min)	4 gpm (15.1 L/min)	4 gpm (15.1 L/min)
High Pressure Pump	3,000 psi (206.8 bar)	3,000 psi (206.8 bar)	3,000 psi (206.8 bar)
High Pressure Hose Length	50' (15.2 m)	50' (15.2 m)	50' (15.2 m)
Low Water Shut Off	Electric	Electric	Electric
SPOIL TANK	573 SGT	873 SGT	1273 SGT
Spoil Tank Capacity	500 gal (1,892.7 L)	800 gal (3,028.3 L)	1,200 gal (4,542.5 L)
Door Type	Hydraulic	Hydraulic	Hydraulic
Tank Lift Type	Hydraulic	Hydraulic	Hydraulic
VACUUM	573 SGT	873 SGT	1273 SGT
Type of Filters	0.5 Micron Filtration	0.5 Micron Filtration	0.5 Micron Filtration
Hose Length	30' (9.1 m)	30' (9.1 m)	30' (9.1 m)
Hose Width	4" (10.2 cm)	4" (10.2 cm)	4" (10.2 cm)
Vacuum	1,000 cfm (28.3 cm m/min)	1,000 cfm (28.3 cm m/min)	1,000 cfm (28.3 cm m/min)
Vacuum Blower Type	PD Blower	PD Blower	PD Blower
Vacuum Mercury	14" hg (.5 bar)	14" hg (.5 bar)	14" hg (.5 bar)
CONTROL PANEL	573 SGT	873 SGT	1273 SGT
Controls	Curbside	Curbside	Curbside
Gauges	Analog	Analog	Analog
OPTIONS (FOR ALL)			

- Strong Arm
- Recirculation Kit
- In-Tank Wash Out System
- Hydraulic Jack

Specifications subject to change without notice.

Vac-Tron Equipment, LLC reserves the right to make changes in engineering, design and specifications; add improvements; or discontinue manufacturing at any time without notice or obligation. Equipment shown is for illustrative purposes only and may display optional accessories or components. Please contact your local Vermeer dealer for more information on machine specifications. Vermeer, the Vermeer logo and Vermeer MV Solutions are trademarks of Vermeer Manufacturing Company in the U.S. and/or other countries. Vac-Tron is a trademark of Vac-Tron Equipment, Inc. © 2019 Vac-Tron Equipment, Inc. All Rights Reserved. Printed in the U.S.A. Please recycle.

