


LP XDT VACUUM EXCAVATOR

VAC-TRON SERIES



CVS (CYCLONE 4-WAY VALVE SILENCER) FILTRATION SYSTEM 0.5-micron filtration (best in the industry). The CVS Filter housing also contains the 4-way valve for reverse pressure and an oversized silencer for quiet operation. The silencer is located inside the 28" diameter cyclone.

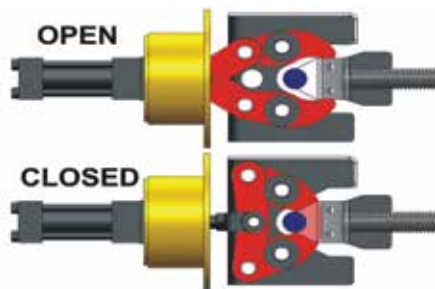

REAR HYDRAULIC CLAW DOOR Rear hydraulic claw door has an over center locking mechanism for a simple no fuss positive lock and unlock.



I BEAM TRAILER Units are built from start to finish at our factory, including the trailer which consists of a sturdy I-Beam construction.



STRONG ARM (OPTION) With 270-degree rotation, the strong arm supports the weight of the vacuum hose and the roller head makes handling much easier by allowing smooth, fluid movements and adjustments.



SIDE HOSE & TOOLING (STORAGE) -S.H.T. (OPTION) The new SHT package allows for 60' of suction hose storage on a trailer mounted unit. This doubles the traditional 30' hose storage on all other brands.



FLOWMASTER (OPTION) The FlowMaster option can be used to hydraulically exercise water valves and hydrants, making sure they will work properly in times of need.

WWW.VERMEERMVS.COM | 888-822-8766



Vermeer
MV Solutions™

DIMENSIONS-TRAILER 573		573 Heavy	873	873 Heavy	1273
Length	231" (586.7 cm)	231" (586.7 cm)	268.8" (682.8 cm)	268.8" (682.8 cm)	265" (673.1 cm)
Width	92" (234 cm)	97" (246 cm)	92" (234 cm)	102" (259 cm)	102" (259 cm)
Height	95" (241 cm)	95" (241 cm)	95" (241 cm)	95" (241 cm)	122" (310 cm)
Empty Weight	6,300 lbs (2,858 kg)	6,300 lbs (2,858 kg)	7,400 lbs (3,357 kg)	7,500 lbs (3,402 kg)	9,400 lbs (4,264 kg)
GVWR	12,000 lbs (5,443.1 kg)	14,000 lbs (6,350.3 kg)	14,000 lbs (6,350.3 kg)	20,000 lbs (9,071.8 kg)	24,000 lbs (10,886.2 kg)
Trailer Axles	(2) 7,000 lbs (3,175 kg)	(2) 7,000 lbs (3,175 kg)	(2) 7,000 lbs (3,175 kg)	(2) 10,000 lbs (4,535.9 kg)	(2) 12,000 lbs (5,443.1 kg)
ENGINE 573		573 Heavy	873	873 Heavy	1273
Make and Model	Kohler Diesel T4 Final	Kohler Diesel T4 Final	Kohler Diesel T4 Final	Kohler Diesel T4 Final	Kohler Diesel T4 Final
Horsepower	24 hp (17.9 kw)	24 hp (17.9 kw)	24 hp (17.9 kw)	24 hp (17.9 kw)	24 hp (17.9 kw)
Fuel Tank Capacity	30 gal (113.5 L)	30 gal (113.5 L)	30 gal (113.5 L)	30 gal (113.5 L)	30 gal (113.5 L)
Enclosure	Yes	Yes	Yes	Yes	Yes
WATER TANK 573		573 Heavy	873	873 Heavy	1273
Water Tank Capacity	200 gal (757.1 L)	300 gal (1,135.6 L)	200 gal (757.1 L)	400 gal (1,514.1 L)	400 gal (1,514.1 L)
Number of Tanks	2	2	2	2	2
Pump Flow Rate	4 gpm (15.1 L/min)	4 gpm (15.1 L/min)	4 gpm (15.1 L/min)	4 gpm (15.1 L/min)	4 gpm (15.1 L/min)
High Pressure Pump	3,000 psi (206.8 bar)	3,000 psi (206.8 bar)	3,000 psi (206.8 bar)	3,000 psi (206.8 bar)	3,000 psi (206.8 bar)
Hose Length	50' (15 m)	50' (15 m)	50' (15 m)	50' (15 m)	50' (15 m)
Low Water Shut Off	Yes	Yes	Yes	Yes	Yes
SPOIL TANK 573		573 Heavy	873	873 Heavy	1273
Spoil Tank Capacity	500 gal (1,892.7 L)	500 gal (1,892.7 L)	800 gal (3,028.3 L)	800 gal (3,028.3 L)	1,200 gal (4,542.5 L)
Door Type	Hydraulic	Hydraulic	Hydraulic	Hydraulic	Hydraulic
Tank Lift Type	Hydraulic	Hydraulic	Hydraulic	Hydraulic	Hydraulic
VACUUM 573		573 Heavy	873	873 Heavy	1273
Type of Filters	Cartridge 0.5 Microns	Cartridge 0.5 Microns	Cartridge 0.5 Microns	Cartridge 0.5 Microns	Cartridge 0.5 Microns
Hose Length	30' (9.1 m)	30' (9.1 m)	30' (9.1 m)	30' (9.1 m)	30' (9.1 m)
Hose Width	3" (7.6 cm)	3" (7.6 cm)	3" (7.6 cm)	3" (7.6 cm)	3" (7.6 cm)
Vacuum	580 cfm (16 cm m/min)	580 cfm (16 cm m/min)	580 cfm (16 cm m/min)	580 cfm (16 cm m/min)	580 cfm (16 cm m/min)
Vacuum Blower Type	PD Blower	PD Blower	PD Blower	PD Blower	PD Blower
CONTROL PANEL 573		573 Heavy	873	873 Heavy	1273
Controls	Curbside	Curbside	Curbside	Curbside	Curbside
Gauges	Analog	Analog	Analog	Analog	Analog

OPTIONS (FOR ALL)

- Strong Arm
- FlowMaster Package
- Recirculation Kit
- Hydraulic Jack
- SHT Package

Specifications subject to change without notice.

Vac-Tron Equipment, LLC reserves the right to make changes in engineering, design and specifications; add improvements; or discontinue manufacturing at any time without notice or obligation. Equipment shown is for illustrative purposes only and may display optional accessories or components. Please contact your local Vermeer dealer for more information on machine specifications. Vermeer, the Vermeer logo and Vermeer MV Solutions are trademarks of Vermeer Manufacturing Company in the U.S. and/or other countries. Vac-Tron is a trademark of Vac-Tron Equipment, Inc. © 2019 Vac-Tron Equipment, Inc. All Rights Reserved. Printed in the U.S.A. Please recycle.

