


# CV GT VACUUM EXCAVATOR

## VAC-TRON SERIES



**0.5 MICRON FILTRATION** Cyclonic filtration separator as well as a secondary filter to clean the air down to 0.5 microns.

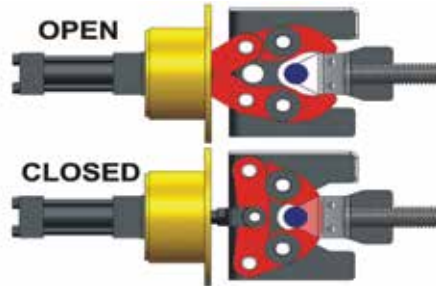

**REAR HYDRAULIC CLAW DOOR** Rear hydraulic claw door has an over center locking mechanism for a simple no fuss positive lock and unlock.



**POLYMER LINER** The polymer liner inside the debris tank on the bottom half makes for easy dumping and cleanout.



**STRONG ARM (OPTION)** With 270-degree rotation, the strong arm supports the weight of the vacuum hose and the roller head makes handling much easier by allowing smooth, fluid movements and adjustments.



**REVERSE PRESSURE** Reverse Pressure to off-load liquids and dislodge debris in hose is standard.



**I BEAM TRAILER** Units are built from start to finish at our factory, including the trailer which consists of a sturdy I-Beam construction.



<b>DIMENSIONS-TRAILER</b>	<b>573 GT</b>	<b>873 GT</b>	<b>1273 GT</b>
<b>Length</b>	228" (579 cm)	246" (625 cm)	248" (630 cm)
<b>Width</b>	93" (236 cm)	97" (246 cm)	102" (259 cm)
<b>Height</b>	89" (226 cm)	89" (226 cm)	122" (310 cm)
<b>Empty Weight</b>	4,800 lbs (2,177 kg)	5,300 lbs (2,404 kg)	7,300 lbs (3,311 kg)
<b>GVWR</b>	9,995 lbs (4,534 kg)	14,000 lbs (6,350 kg)	24,000 lbs (10,886 kg)
<b>Trailer Axles</b>	(2) 7,000 lbs (3,175 kg)	(2) 7,000 lbs (3,175 kg)	(2) 12,000 lbs (5,443 kg)
<b>ENGINE</b>	<b>573 GT</b>	<b>873 GT</b>	<b>1273 GT</b>
<b>Make and Model</b>	Kohler EFI Gas	Kohler EFI Gas	Kohler EFI Gas
<b>Horsepower</b>	27 hp (20.1 kw)	27 hp (20.1 kw)	27 hp (20.1 kw)
<b>Fuel Tank Capacity</b>	14 gal (53 L)	14 gal (53 L)	14 gal (53 L)
<b>Enclosure</b>	N/A	N/A	N/A
<b>WATER TANK</b>	<b>573 GT</b>	<b>873 GT</b>	<b>1273 GT</b>
<b>Water Tank Capacity</b>	200 Gallon	300 Gallon	400 Gallon
<b>Number of Tanks</b>	2	2	2
<b>High Pressure Pump Flow Rate</b>	4 gpm (15.1 L/min)	4 gpm (15.1 L/min)	4 gpm (15.1 L/min)
<b>High Pressure Pump</b>	3,000 psi	3,000 psi	3,000 psi
<b>High Pressure Hose Length</b>	50' (15.24 m)	50' (15.24 m)	50' (15.24 m)
<b>Low Water Shut Off</b>	Electric	Electric	Electric
<b>SPOIL TANK</b>	<b>573 GT</b>	<b>873 GT</b>	<b>1273 GT</b>
<b>Spoil Tank Capacity</b>	500 gal (1,892.7 L)	800 gal (3,028.3 L)	1,200 gal (4,542.5 L)
<b>Door Type</b>	Hydraulic	Hydraulic	Hydraulic
<b>Tank Lift Type</b>	Hydraulic	Hydraulic	Hydraulic
<b>VACUUM</b>	<b>573 GT</b>	<b>873 GT</b>	<b>1273 GT</b>
<b>Type of Filters</b>	0.5 Micron Separation	0.5 Micron Separation	0.5 Micron Separation
<b>Hose Length</b>	30' (9.1 m)	30' (9.1 m)	30' (9.1 m)
<b>Hose Width</b>	3" (7.6 cm)	3" (7.6 cm)	3" (7.6 cm)
<b>Vacuum</b>	580 cfm (16.2 cm m/min)	580 cfm (16.2 cm m/min)	580 cfm (16.2 cm m/min)
<b>Vacuum Blower Type</b>	PD Blower	PD Blower	PD Blower
<b>Vacuum Mercury</b>	15" hg (.5 bar)	15" hg (.5 bar)	15" hg (.5 bar)
<b>CONTROL PANEL</b>	<b>573 GT</b>	<b>873 GT</b>	<b>1273 GT</b>
<b>Controls</b>	Curbside	Curbside	Curbside
<b>Gauges</b>	Analog	Analog	Analog

**OPTIONS (FOR ALL)**

- Strong Arm
- Recirculation Kit
- Hydraulic Jack
- Air Gap
- In Tank Washout

Specifications subject to change without notice.

Vac-Tron Equipment, LLC reserves the right to make changes in engineering, design and specifications; add improvements; or discontinue manufacturing at any time without notice or obligation. Equipment shown is for illustrative purposes only and may display optional accessories or components. Please contact your local Vermeer dealer for more information on machine specifications. Vermeer, the Vermeer logo and Vermeer MV Solutions are trademarks of Vermeer Manufacturing Company in the U.S. and/or other countries. Vac-Tron is a trademark of Vac-Tron Equipment, Inc. © 2019 Vac-Tron Equipment, Inc. All Rights Reserved. Printed in the U.S.A. Please recycle.

